
vMEyeSuper iPhone Cellphone Monitoring client English manual

Written by: the test department

Write the date: 2013.9.2

Version: V1.0

Contents

Contents	1
1. Introduction	3
1.1 Brief Introduction.....	3
1.2 Main Functions.....	3
2. Installation	4
2.1 Acquire vMEyeSuper	4
3. Application Running	5
3.1 Interface Description	5
3.2 Live Preview	8
3.3 Add Device.....	9
3.4 Switch Channel	12
3.5 PTZ Control	14
3.6 Local Video	14
3.7 Photos.....	16
3.8 Remote Playback.....	16
3.9 Online Alarm.....	17
3.10 Intercom	18
3.11 Switch Language	18

1. Introduction

1.1 Brief Introduction

vMEyeSuper is the video surveillance application developed for iPhone OS. This application can be used on iPhone, iPod Touch and iPad, supports iOS that is higher than 3.0 released.

This document mainly introduces how to set and use vMEyeSuper software for iOS.

1.2 Main Functions

Main Functions:

- Support Chinese, English;
- View the cameras on real time via wifi and GPRS;
- Adopt direct connection, without third party server transfer;
- Support multi-channel switching (32 channel max);
- Support remote play;
- Support device configuration, modification and delete;
- Support IP and DDNS access;
- Support Pan, Tilt & Zoom control;
- Support Snap-shot and view;
- Support video records and view;
- Support alarm reminding;

-
- Support intercom;

2. Installation

2.1 Acquire vMEyeSuper

Users can acquire this app either through downloading from App Store or from the manufacturers.

As downloading from App Store, you may first search “vMEyeSuper”, and install it on line, as the following picture shows:



2.1a


Then click “Install”, the application will be automatically installed into your mobile phone, like the below picture shows 2.1b:




3. Application Running


3.1 Interface Description


After successfully installed the application into mobile phones, it is ready to run,

just click the vMEyeSuper  icon in the main menu. The main interface looks like 3.1a as below:

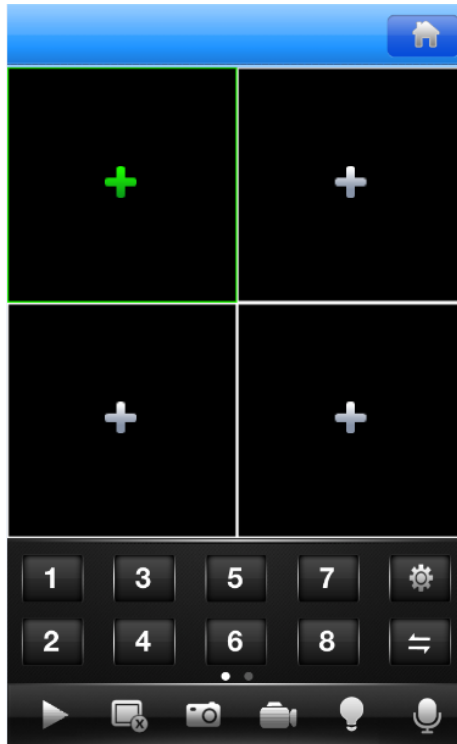


3.1a

Click “” icon on top right, then you can access the main menu interface and see corresponding operation options, including device list, photos, local video, options and about ect.

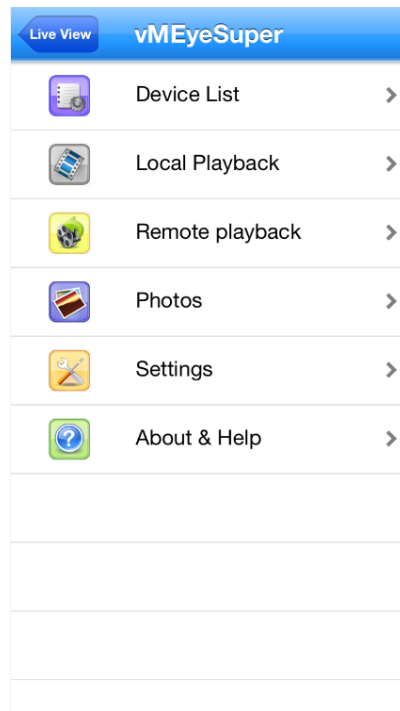

3.1b

- **Device List:** Add a new device, or modify the settings;
- **Remote Playback:** Check the videos on the device
- **Photos:** Save the snapshot on the phone when viewing the cameras through the phone; after clicking Photos, you will see the photos as thumbnail. Enlarge the photos by clicking it.
- **Local Video:** If vMEyeSuper has record function, after clicking video records, you will see the details of the records. The name of the record file will be generated by system default according to recording time.
- **Settings:** After clicking Settings, you will see all settings as below:

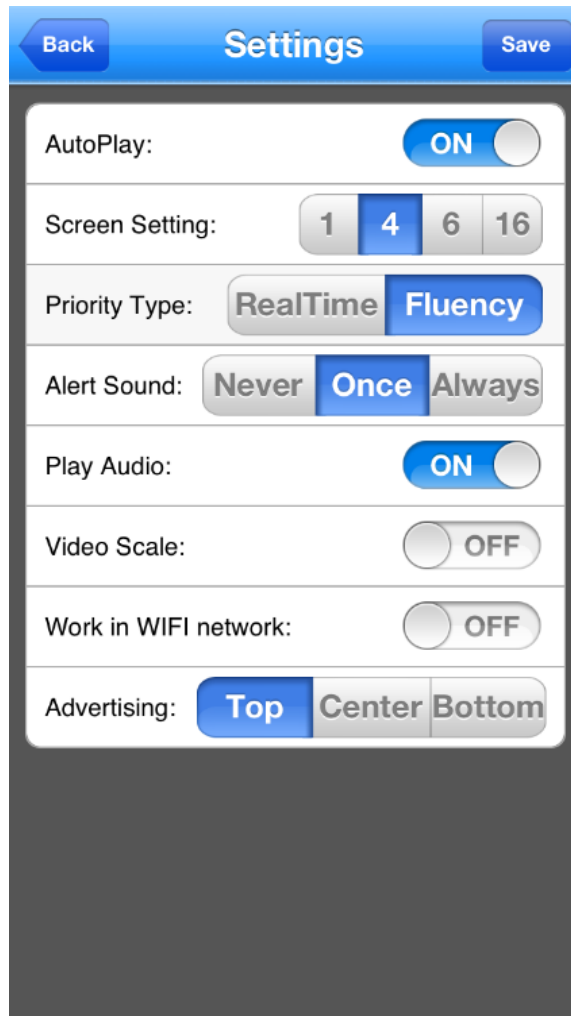

3.1c

- **Auto play:** Select “AutoPlay”, it will display the video surveillance automatically on your next login. If turn it off, it will not display your last time video on the next login.
- **Screen Setting:** You can set the live view screen as 1, 4, 6 and 16 channels at the same time (16 ch only display i frame, the frame will jump for a few seconds, mainly based on the i frame time interval you set.)
- **Priority Type:** “Fluency” mode may be 1 or 2 seconds delay but play in a smooth stream. While “Real Time” mode gets the real time data to display.
- **Alert Sound:** Set the type of alert sound.
- **Play Audio:** Trigger the voice prompt type alarm: no need, once or loop
- **Video Scale:** Set preview cameras according to device’s actual scale or

stretching automatically according to the windows.


➤ **Work in WIFI network:** Will only work in WIFI after setting.

➤ **Advertising:** Set the position of the advertisement.

● **About:** The related information of the application.


3.2 Live Preview




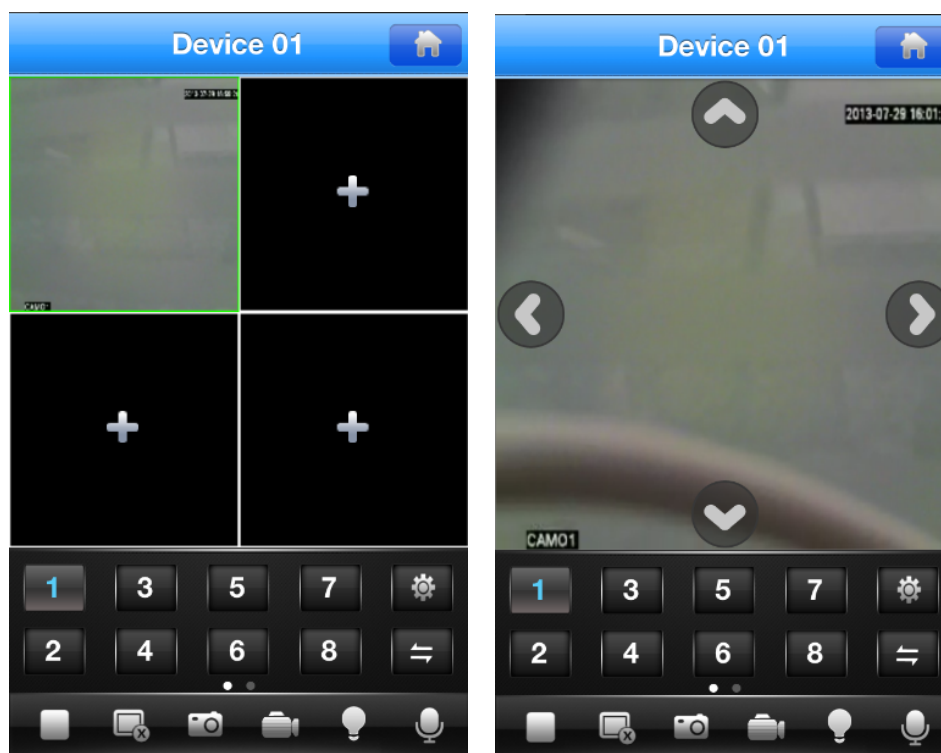









Click “Live Preview” on top left in the main menu interface, back to display interface, double click the windows to enlarge it, it will show PTZ control after clicking it again. It also supports gesture to zoom in, like 3.2a as below:



3.2a


Instructions of the functions on live preview interface as below:

Function Key	Description
	Back to Main Menu

	Channel selecting: You can select the channels playing
	Select the group of channels
	Play / Stop
	Delete Display Records
	Snapshot
	Video Records
	Quick Access Device List, edit and select the device
	Alert Prompt
	Intercom
	Left Slip to Display PTZ Control Button
	Control the directions of the camera
	Zoom in / Zoom out
	Convergence control and Control aperture

3.3 Add Device

If this is the first time to use vMEyeSuper app, you need to put in all the information needed. Steps as below:

- Click “

9



3.3a

- Click “+” on “Device List” on bottom left to access “Detail” interface, like 3.3b as below:

The screenshot shows a mobile application interface titled "Device Detail". At the top, there is a blue header bar with a "Back" button on the left and a "Save" button on the right. Below the header, there is a form with the following fields: "Name:" with the value "Device 01", "Address:" with an empty text box, "TCP Port:" with the value "34567", "User ID:" with an empty text box, "Password:" with an empty text box, and "Max Channel:" with a row of buttons: "1", "4", "8", "16", and "32". The "16" button is currently selected and highlighted in blue.

3.3b

- Name: The names of equipment, which can help you identify different devices, for examples, you can type the names based on the location of the equipment. The name will be showed on the topside title bar of display interface.
- Address: DVR/IPC IP address or DDNS. (Must be an Internet address)
- Port: It means TCP port, and you can acquire TCP port in the setting information of the device. Please use the default port: 34567.
- User ID: the default user name of terminal device is “admin”.
- Password: the default password of terminal device is blank, match with user name, .
- Max Channel: the channels of your DVR supported, 32 channels max.



After editing, please click “Save” to save the information. Click “Back”, turn back to “Device List”, you will see the name, channels, address ect, like 3.3c as below:




3.3c




3.3d

- Click “”, it will show import and export, like 3.3d. You can back up the device list by clicking Export. It’s saved in share folders of the application, can get it out through iTunes. Please read the About and Help for the operation. Import the saved device list by clicking Import.
- Click “”, and click any device on “Device List” to edit setting information. Click

“Save” to finish the modification.

- Click “” to delete the selected device. For example, click 64 in “Device List”, will show notice like 3.3e, select “Yes”, and delete 64.

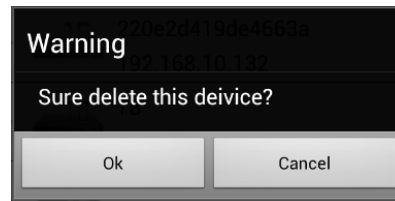


3.3e

3.4 Switch Channel

- Switch the channels within the same device:


Switch the channels within the same device, you could select the numbers of the display windows showed in Area 2 in 3.4a to switch the channels; if the number of the channels is over 8 channels, you could select Area 3 to switch channel-group, then select the other numbers in this channel-group to switch the channels;

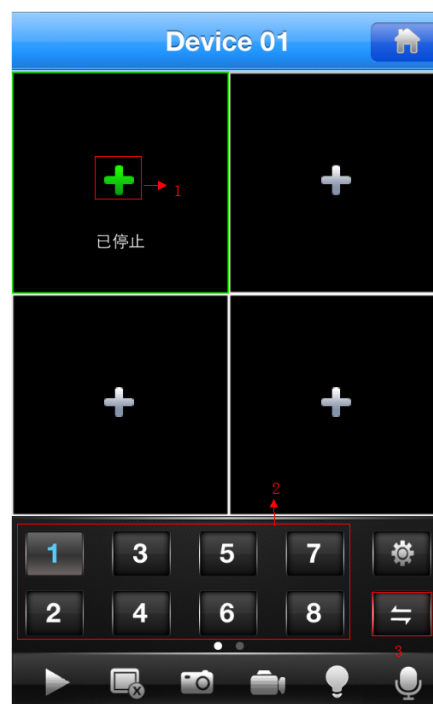

3.4a

- Switch the channels within different devices:

If you want to switch to the channels on other devices, steps as below:

- Press “” to stop or turn the playing video off;
- Click “+” on display interface, like Area 1 in 3.4a, then access device list interface;
- Select the device which switched to, will show the channel list of this device, like 3.4b;



3.4b


- Select the channels in the channel list of this device, turn back to display interface to view the camera of this channel.

3.5 PTZ Control

Left slip “” to “PTZ Control”, like 3.5a and 3.5b as below:





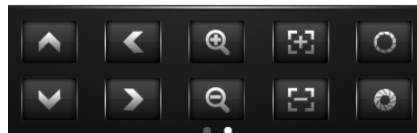







3.5a



3.5b


Function keys of PTZ control as below:


-    : control PTZ direction;
-  : zoom in and zoom out;
-  : Convergence control;
-  : change aperture

3.6 Local Video

The videos will be saved on the phone after recording the videos. Steps as below:


- **Play Video:**


- Click “”to access main menu interface, select “local video” to access “local video” list interface, like 3.6a:
- Click the video record, for example 20130729165737.mp4, to view this video record.

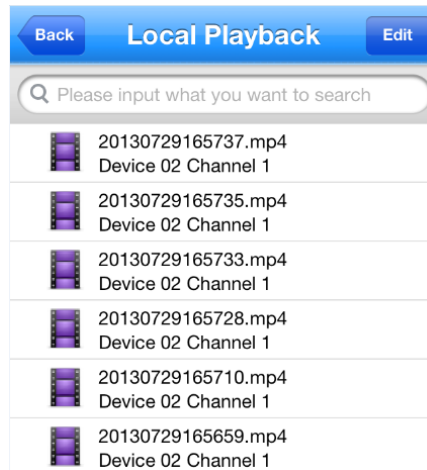

3.6a

Delete:

- Click " "to access the main menu interface, select "record" to access "record" list interface, like 3.6a:
- Click "Edit", select the needed record, like 3.4b, save the record to album for checking and saving; delete the selected record by clicking "Delete";
- Click "Done" and back to "Local Playback";
- Click "Back" to the main menu;

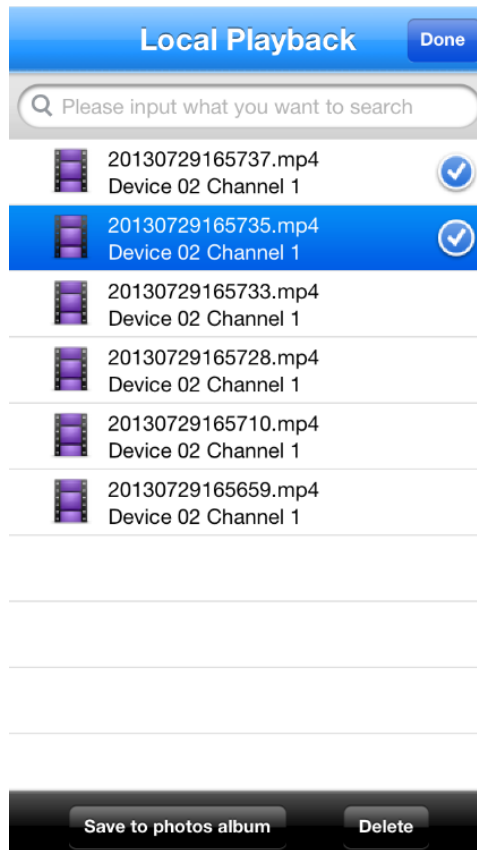


3.6b

3.7 Photos

The photos are the snap-shot when viewing the cameras which saved on the album. You also can check and batch save and delete ect. The steps are the same as 3.4.


3.8 Remote Playback



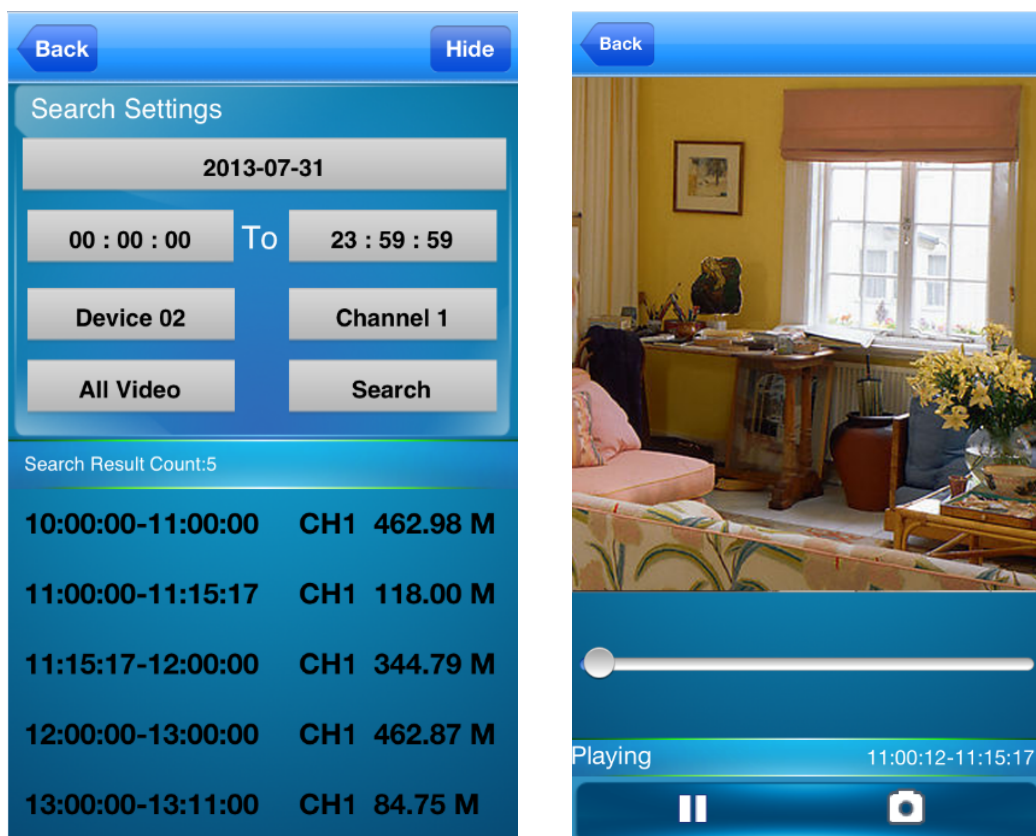


The application can visit the device remotely, collect the records saved from the device, to remote playback. Select time, device and channel and click “Search”, then click any record to playback.













3.8a

3.9 Online Alarm

There is any alarm prompt  from any channels when previewing, click the prompt button to check the alarm message from the corresponding device and channels (alarm time and type). You can click “Edit” to delete or clear the alarm message, like 3.9a:

Back		Edit
	Device 04 Channel 1	2013-07-31 13:20:01 Motionalarm
	Device 04 Channel 1	2013-07-31 13:19:57 Video mask alarm
	Device 04 Channel 1	2013-07-31 13:19:55 Motionalarm
	Device 04 Channel 1	2013-07-31 13:19:46 Video mask alarm
	Device 04 Channel 1	2013-07-31 13:19:44 Video mask alarm

Clear		Done
	 Device 04 Channel 1	2013-07-31 13:2 Motiona
	 Device 04 Channel 1	2013-07-31 13:1 Video mask a
	 Device 04 Channel 1	2013-07-31 13:1 Motiona
	 Device 04 Channel 1	2013-07-31 13:1 Video mask a
	 Device 04 Channel 1	2013-07-31 13:1 Video mask a

3.9a

3.10 Intercom

Intercom for the selecting device. Click “” and active as “”. Talk between application and device for each other, to intercom.

3.11 Switch Language

When you switch the language on your phone, the language of the application will be changed as well. For example, it's switched to English on your phone; the language of the application will be switched to English as well.